



Weep holes should always be located directly on the flashing.

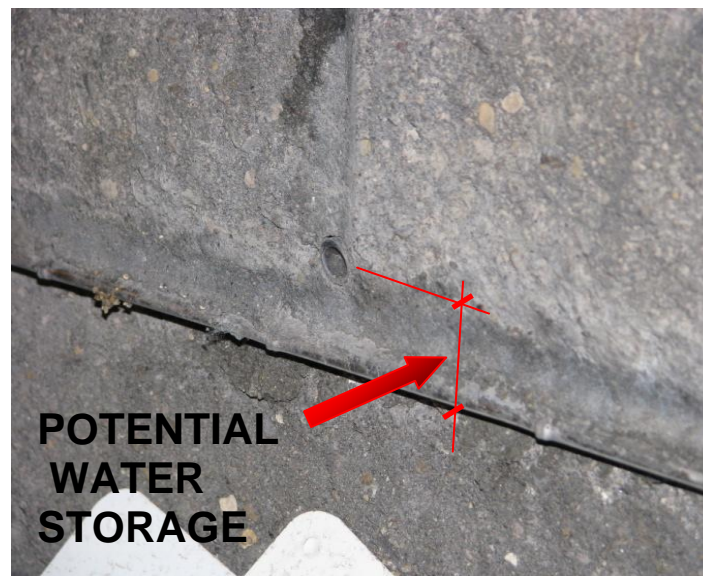

Weep holes located on top of mortar above flashing does not work and will create a wall issue due to water storage!

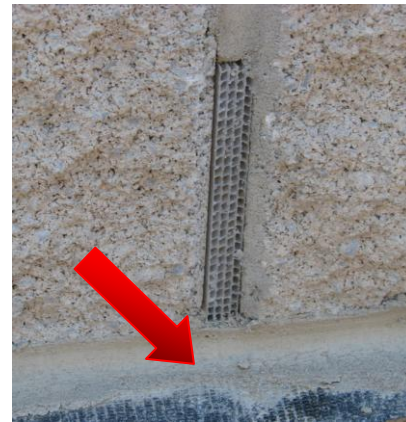

We need to be **reviewing and verifying** the weep locations with the Sub-contractor early in the installation process and throughout the installation.