


**We must make sure that the SS Drip edge overlaps and under the SS drip is properly sealed.**



**We should be installing a silicone, such as Dow 790, at the splice, located at all sides (Box Pattern), and at the front of the drip edge.**

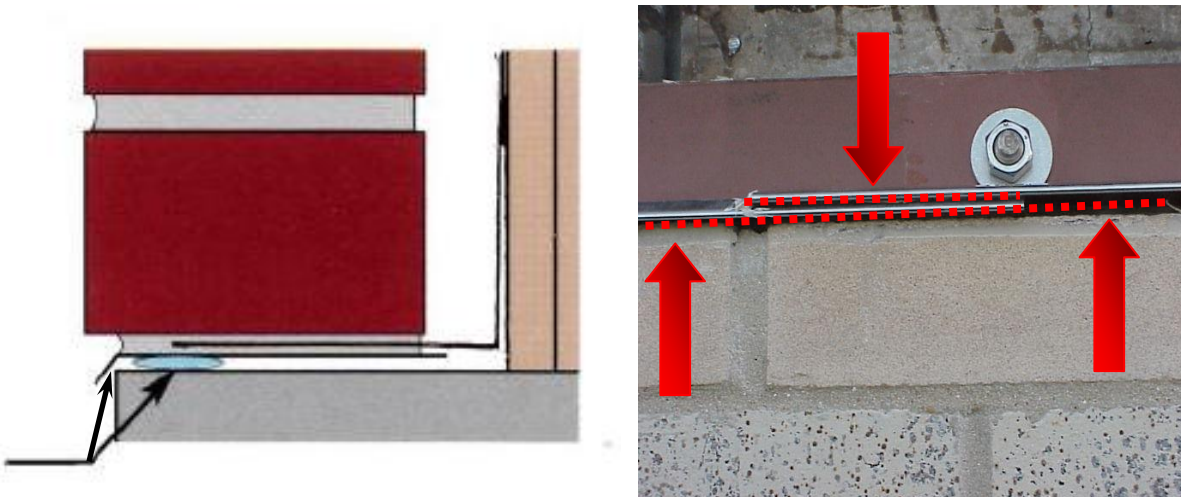

**Also, we should be installing a silicone sealant, such as Dow 790, under the stainless steel flashing and just under the hemmed edge & the face of the masonry in order to make sure that water does not enter the system below the wall flashing.**