


When reviewing Cold Formed Metal Framing (CFMF) shop drawings, always review each page to identify notes that are from the CFMF Engineer identifying coordination items or items of concern...

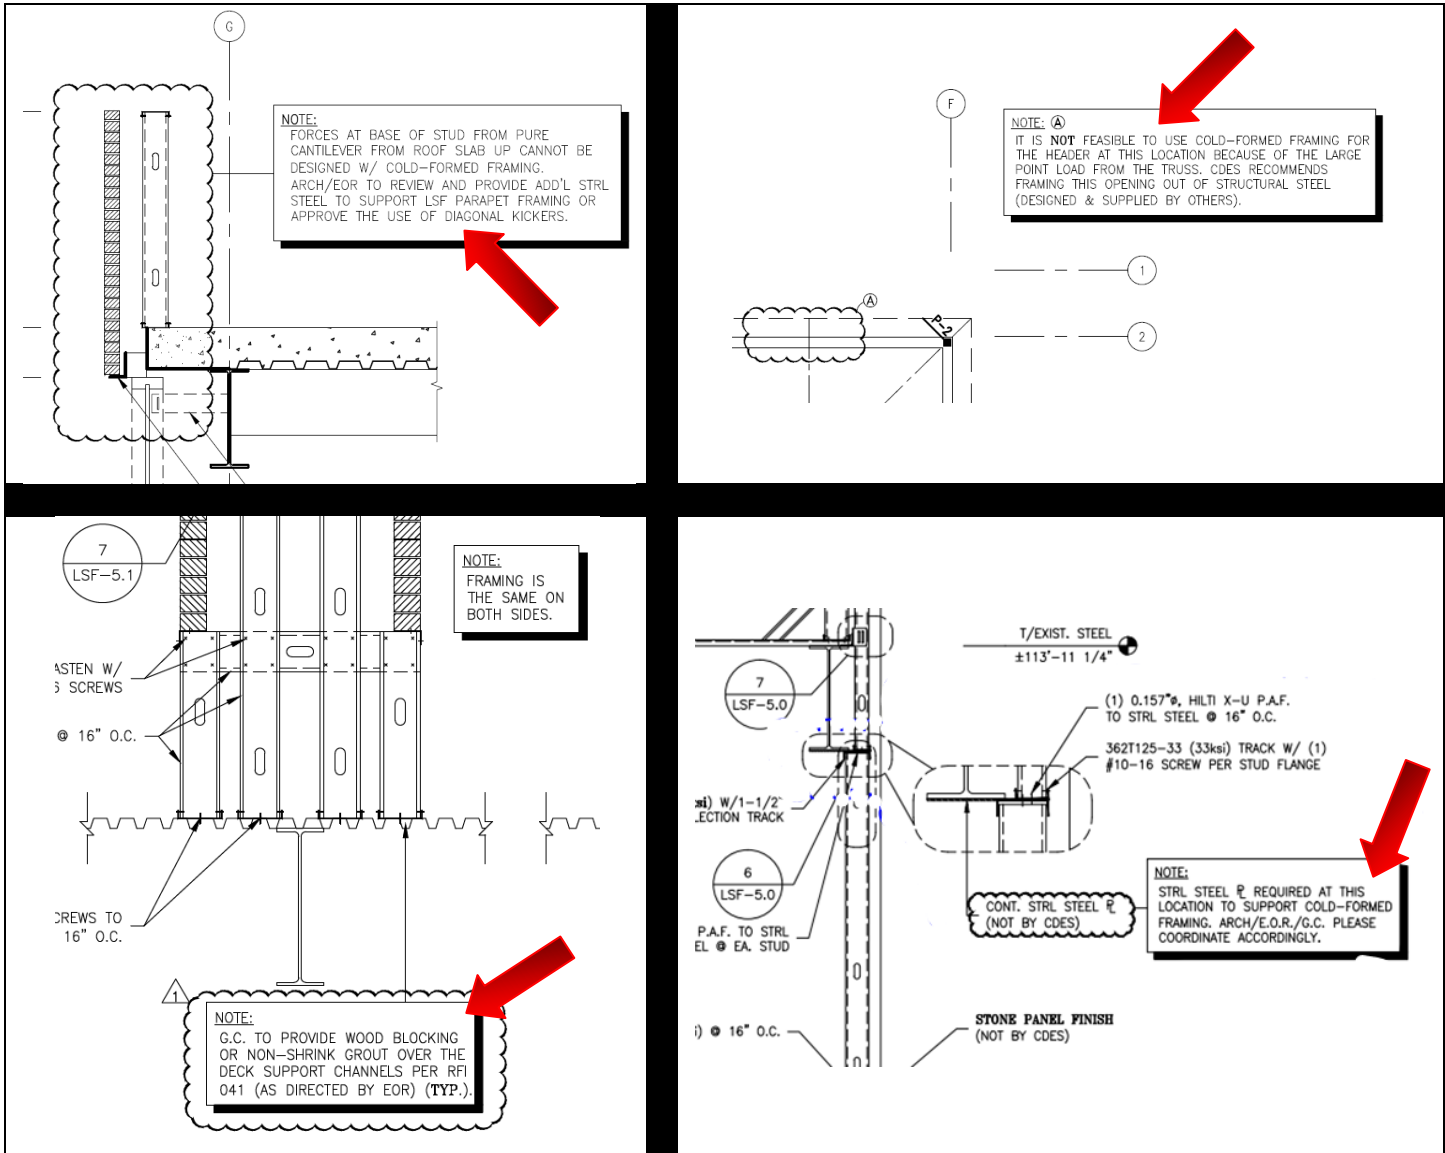

These notes are only identified on the drawings near each concern, so each page should be reviewed carefully.

Some items are identifying when steel is needed, or another trades work must be in place prior to the CFMF. *(these notes are sometimes overlooked by the design team)*

Also note if any CFMF sizes have changed compared to the Design Drawings.

All items should be identified as early as possible, if a structural or CFMF change needs to happen, this re-engineering process could take 1-5 weeks to resolve between all parties...*the key is to catch these items early.*

