





When the roof parapet for a curtainwall or a metal panel system is designed to seal and terminate the roofing to the front face of that system, we must talk to the roofer and double check that the roofing is properly over-cut so that the curtainwall or metal panel system has enough roofing material to properly secure and seal/terminate to the curtainwall or metal panel system.

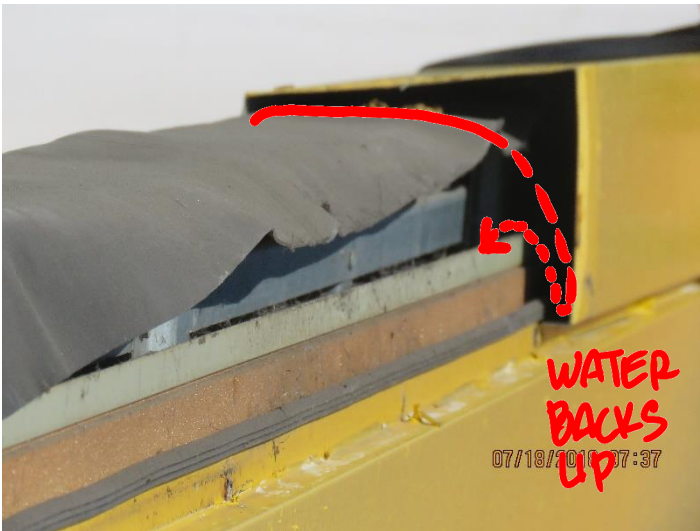

**Roofing not cut or terminated properly, which allows water to get past the system and leak on the interior**

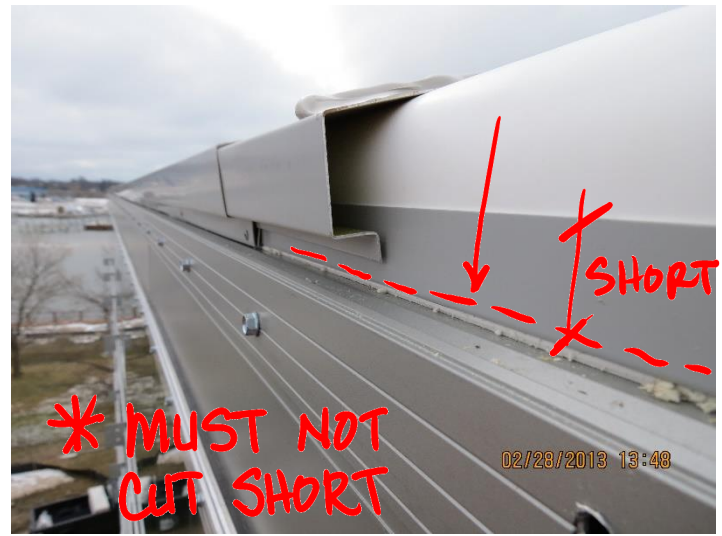

*We recently had to deal with a water intrusion issue on the interior of a metal panel system due to the roofing being cut too short. Water got under the parapet, backed up, and went into the building.*