





For concrete plank construction at a fire rated wall:

There are gaps installed in the precast planks that will be a fire and smoke passageways on either side of the fire rated wall.

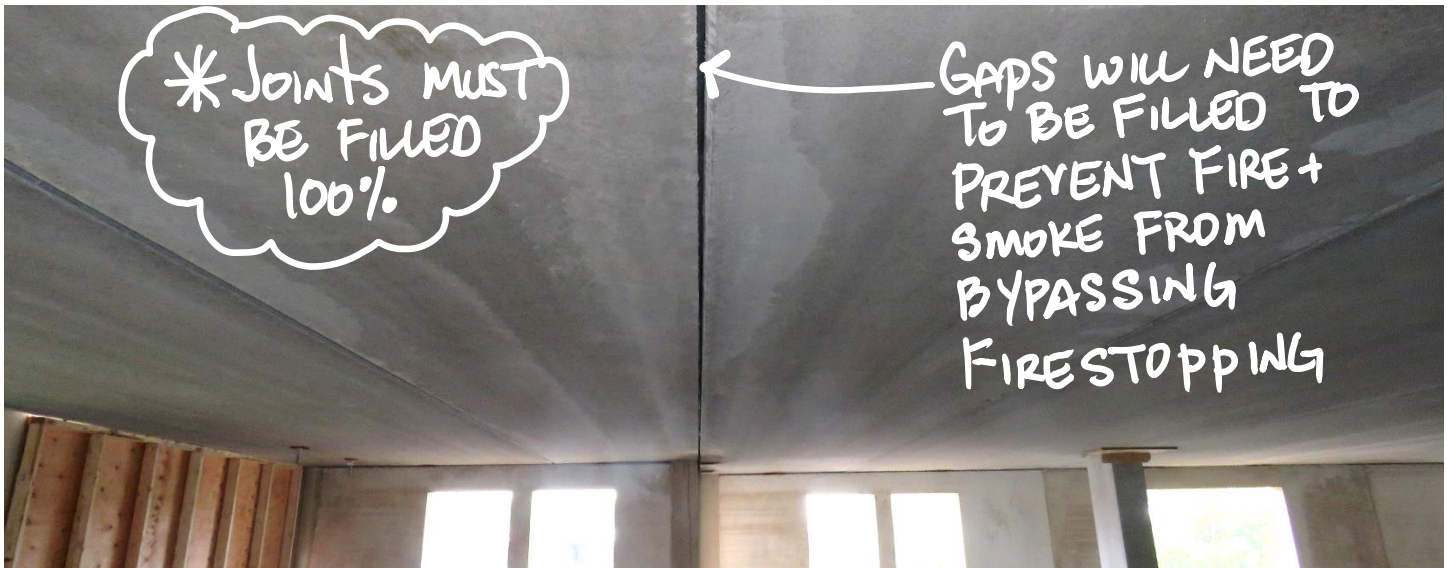

The gaps need to be treated, 100% of the length of the panel

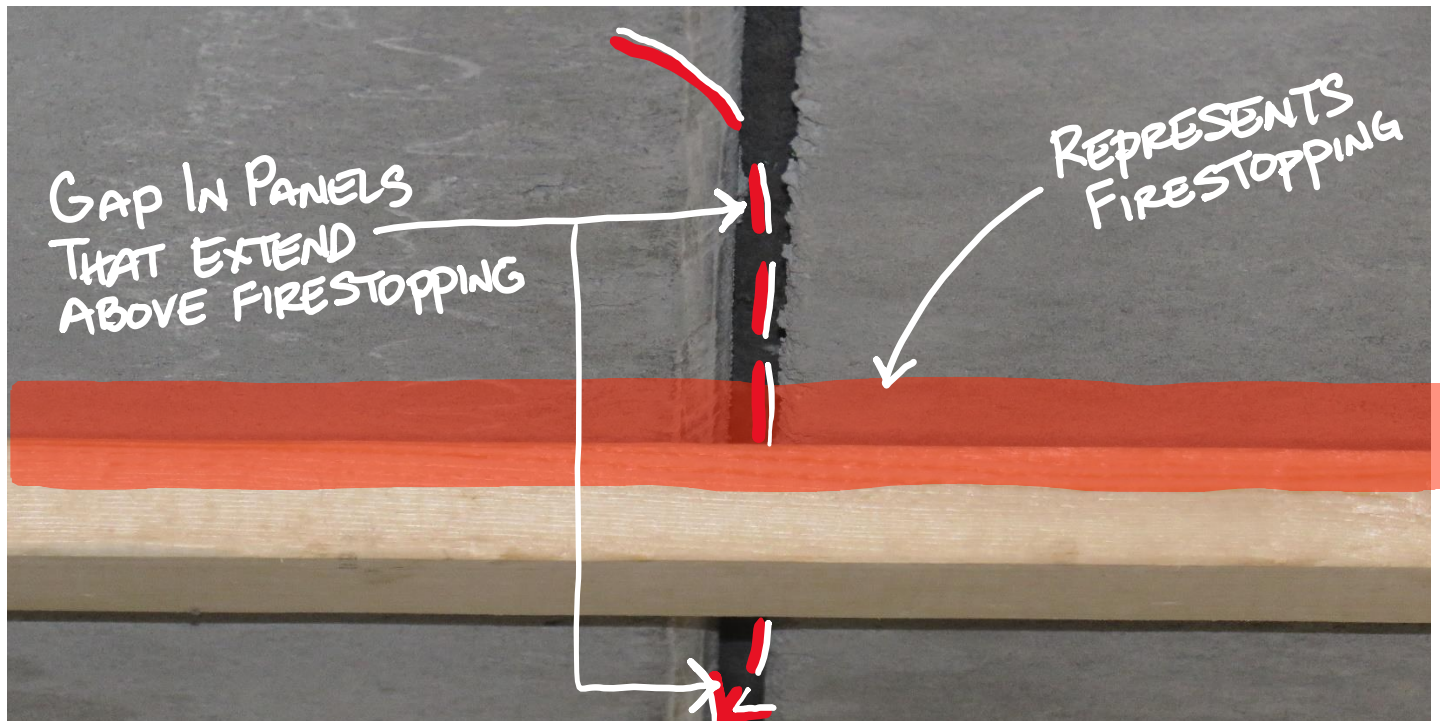

We cannot just seal the joint at the wall...this will not stop the passage above the firestopping.

This is a concern that needs to be discussed and accounted for during bidding on how to manage these joints on the underside if we have fire rated walls.

