




Glass mat sheathing is mold resistant; however, this does not make it mold proof. Generally, this type of material cannot be immersed in water, subjected to constant condensation, or installed in a way that it will wick moisture. Any material, including glass & aluminum will support mold if the conditions are right.



**DO NOT** cover with Visqueen nor any other condensation trapping material

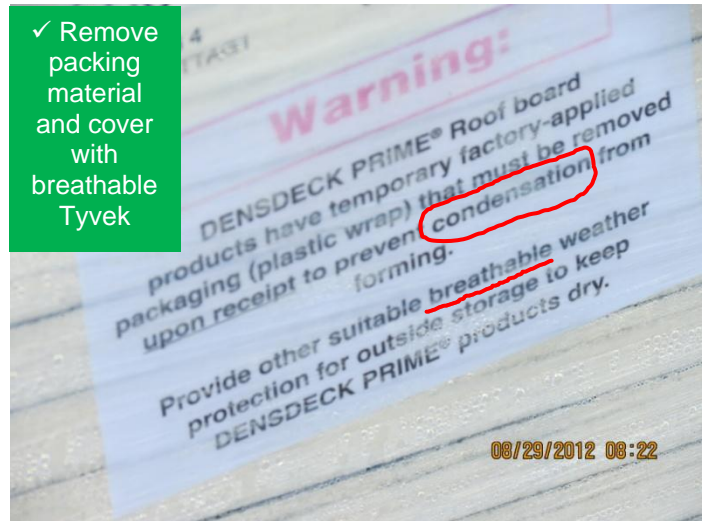

✓ Remove packing material and cover with breathable Tyvek



**DO NOT** store or install in direct contact with concrete



**DO NOT** store within 10ft of exterior wall and cover with Tyvek until building is weatherproof

According to the manufacturer(s) and GA-801, the delivered product must be stored in a protected area from direct sunlight exposure, fully protected from weather, and avoid condensation.

The delivery covering (plastic sheeting) is required to be removed upon delivery and properly covered with a breathable cover, such as Tyvek®.

The material, when installed or being stored must not rest directly on concrete and always align dunnage risers in order to prevent sagging.

Never allow moisture to settle on the sheathing (such as in a horizontal position).