When reviewing Design Development or Construction Drawings, we should be making sure that the Architect has given the skin proper construction tolerance when placing the materials…

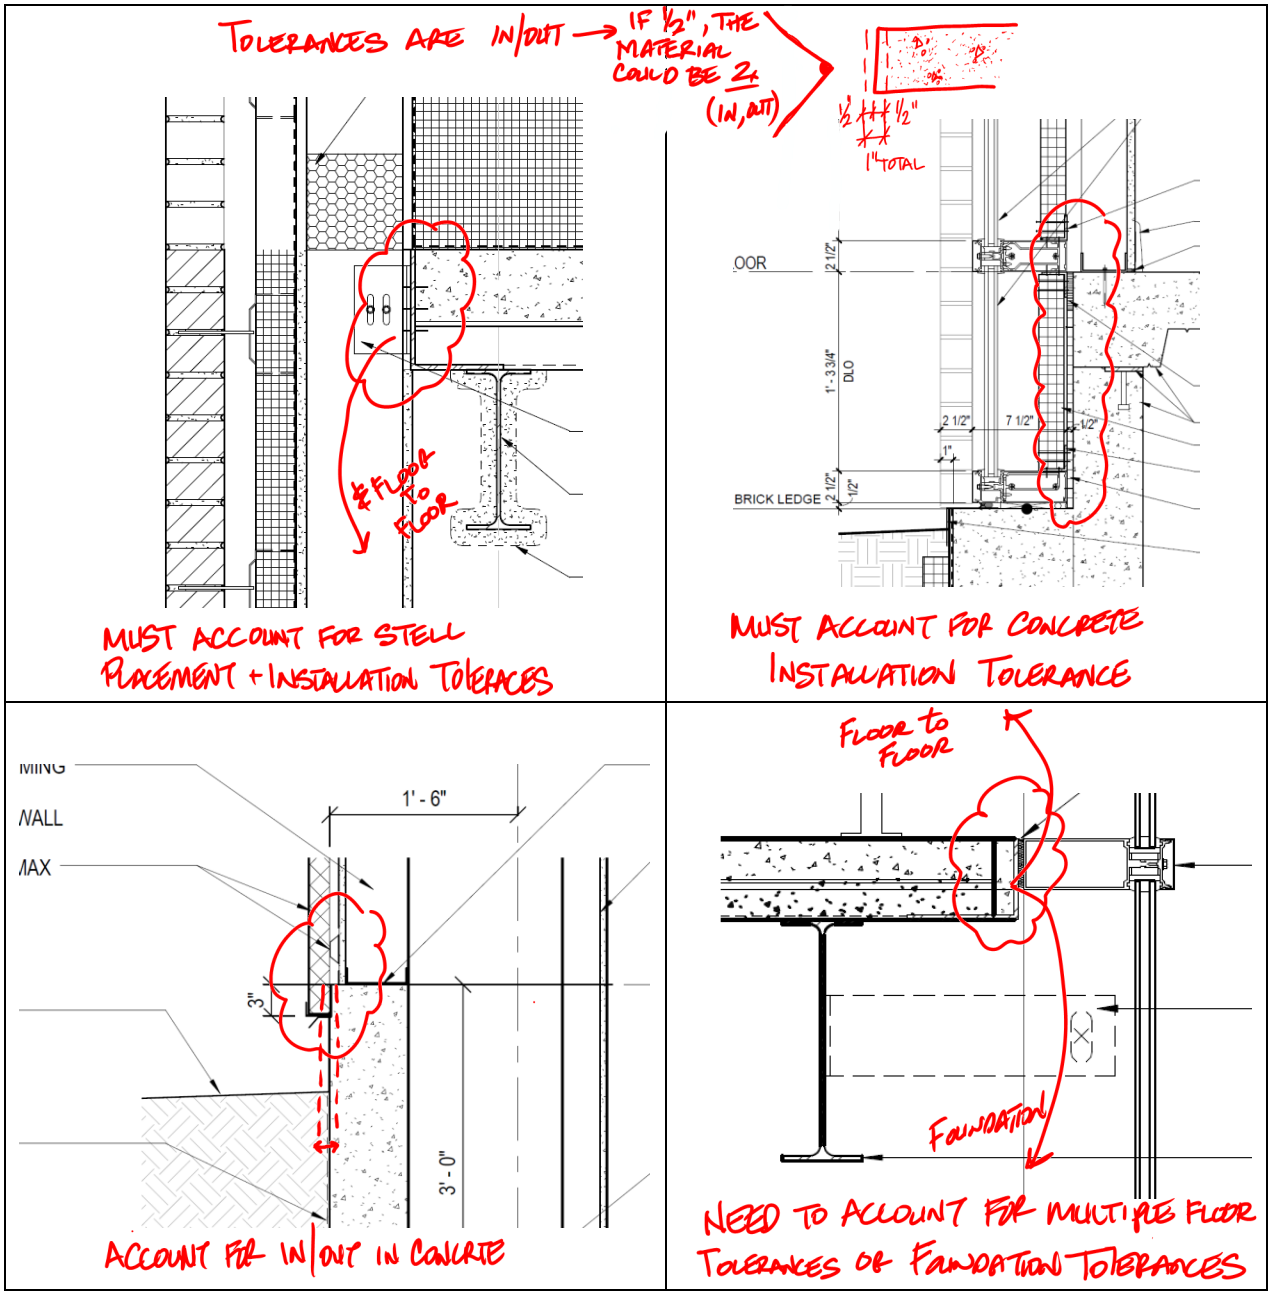

New construction or renovation…both need proper construction tolerance.

Concrete and steel goes in/out and up/down, and the building skin material must accommodate this construction installation. Also discuss live load deflection.

I suggest that we need at least 1" between floor/slab/foundation edges

Copyright © 2012-207 by Pepper Construction Company – All rights Reserved